




CHECK AND ADJUST RAIL SUPPORTS FOR PROPER DISTANCE FROM CONVEYOR TRACK.
(SHOWN FOR RAILEX 510 & 810 TROLLEYS)

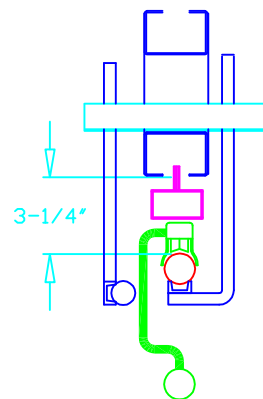

SECTION A-A



SECTION B-B

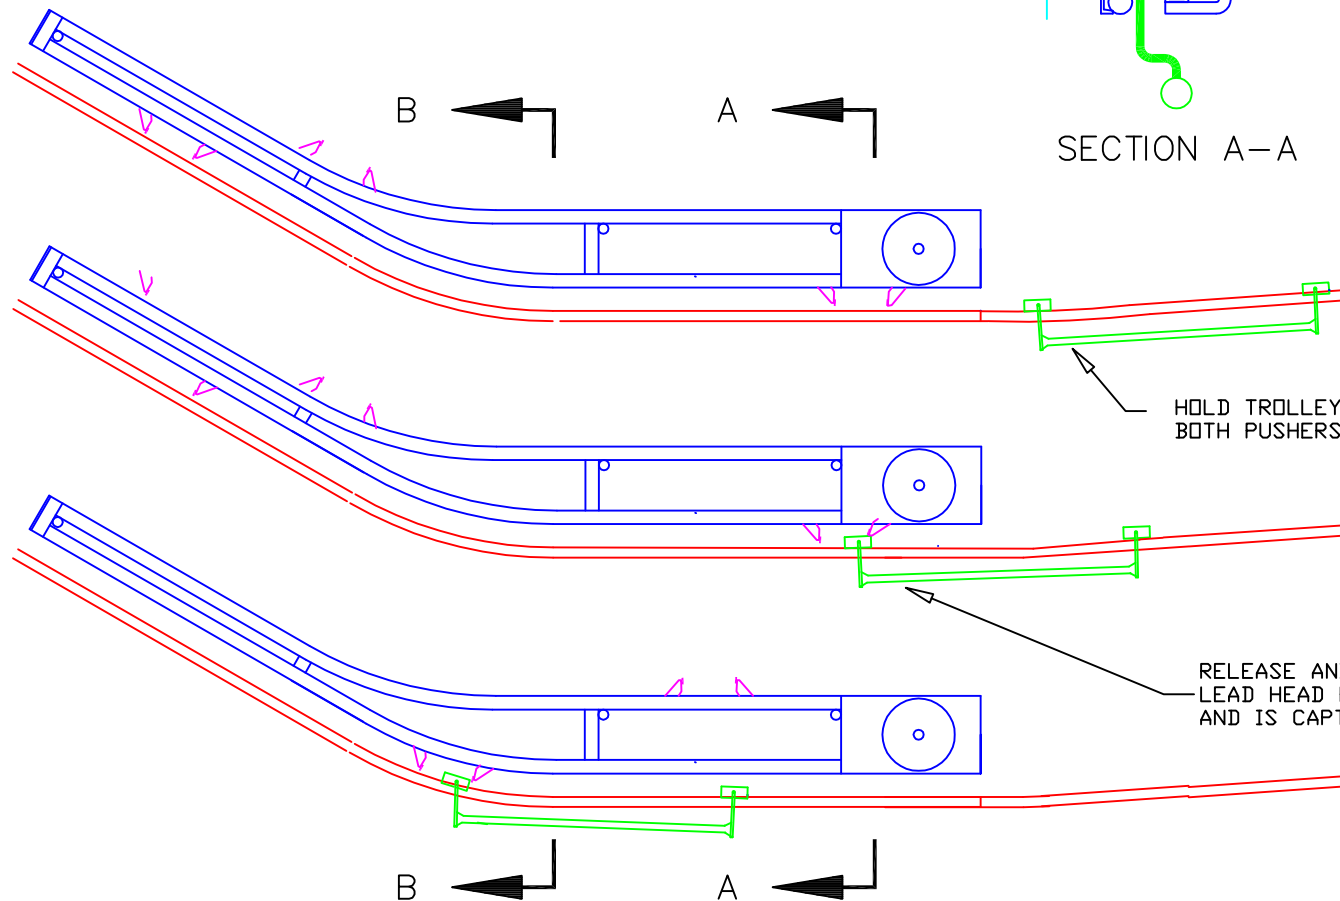

HOLD TROLLEY ON FEED RAIL UNTIL BOTH PUSHERS (DOGS) ARE OVER THE RAIL.

RELEASE AND PUSH THE TROLLEY SO THE LEAD HEAD ROLLS THROUGH THE REAR PUSHER AND IS CAPTIVE BETWEEN THE PAIR.

NOTICE: THIS DRAWING AND DESIGN IS THE SOLE PROPERTY OF RAILEX CORP.

<p>APPROVAL</p> <p>BY:</p> <p><input type="checkbox"/> AS IS <input type="checkbox"/> AS NOTED</p> <p>DATE:</p>	<p>DISTRIBUTION</p> <p><input type="checkbox"/> OWNER <input type="checkbox"/> PRODUCTION</p> <p><input type="checkbox"/> ARCHITECT <input type="checkbox"/> INSTALLATION</p> <p><input type="checkbox"/> FILE <input type="checkbox"/> CONTRACTOR</p>	<p>SCALE: 1/2"=1'-0"</p>	<p>MANUAL TROLLEY FEED SYSTEM 211</p>	<p>RAILEX Corporation</p> <p>89-02 ATLANTIC AVE. QUEENS, NEW YORK 11416 (718) 845-5454</p>
		<p>DRAWN BY:</p>		
		<p>CHECKED BY:</p>		
		<p>PROJ. ENG.:</p>		
		<p>DATE: 13 JAN 1997</p>		<p>NO. DATE REVISIONS</p>
		<p>DWG. NO. 211-MTF-IN</p>		