


CAPACITY:  
 (2) SYS 1102-444 PROVIDES 888 POSITIONS ON 80'-2" OVERALL HANGING.

NOTE: HEAVY WINTER COATS MAY REDUCE CAPACITY BY 25%

NOTE: PROVIDE DISCONNECT SWITCH  
 OR CIRCUIT BREAKER APPROX.  
 5'-0" A.F.F., AT LOCATION  
 CONVENIENT TO OPERATOR

CONTROLS:  
 STANDARD:  
 BI-DIRECTIONAL HAND,  
 LOW VOLTAGE WITH  
 EMERGENCY STOP.  
 OPTIONAL:  
 #1810 D, DIGITAL SELECTOR.

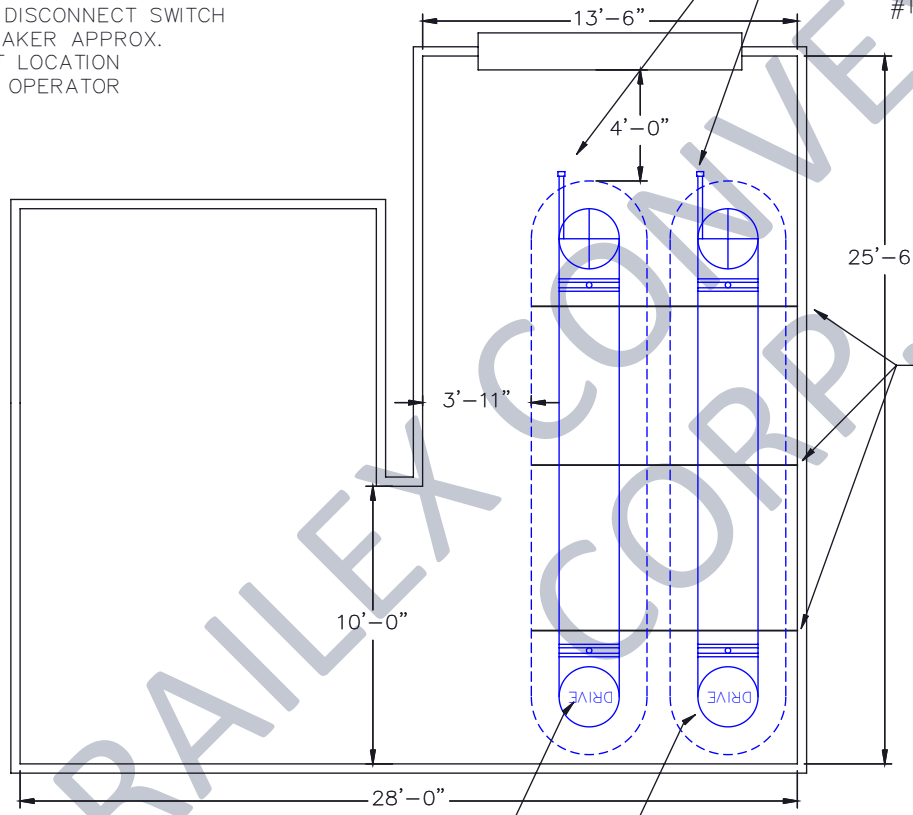

DRIVE UNITS (2): 1/2 H.P. 115 V. 1PH.  
 ASSEMBLY INCLUDES; MOTOR REVERSING CONTACTOR & 24 V. NEC CL 2 TRANSFORMER.

ATTACH POWER SUPPLY AT ± 6'-6" AFF, BY OTHERS.

<b>DESCRIPTION:</b>	RAILEX SYSTEM 1102 CONVEYORS IN COAT CHECK AT MUSEUM	<p style="text-align: center;"><b>RAILEX</b><sup>®</sup> Corp.</p> <p style="text-align: center;">RAILEX CONVEYOR CORPORATION          T. 718-845-5454          railex@railexcorp.com          www.railexcorp.com</p>
<b>DWG. #</b>	02243	
NOTICE: THIS DRAWING AND DESIGN IS THE SOLE PROPERTY OF RAILEX CORP.		